




NEW


GW Instek rolls out the new PCS-1000I isolated output high precision current shunt meter, which inherits the simultaneous voltage and current measurement function of PCS-1000. PCS-1000I adopts five sets of independent shunt resistors to provide five current measurement levels, including 300A, 30A, 3A, 300mA, and 30mA to meet the requirements of different current level measurements. Internally, PCS-1000I utilizes two sets of 24bits ADCs and low temperature coefficient electronic components to mainly focus on the current measurement of power supply devices. High precision PCS-1000I can be used in adjusting and calibrating instruments. Additionally, temperature variation will not cause PCS-1000I to yield any measurement errors. PCS-1000I can automatically select optimal measurement level with the maximum resolution so as to replace manual selection to save operational time.

PCS-1000I provides a BNC output, which can connect with an oscilloscope to directly observe current waveform variation without using a current probe. General oscilloscopes do not have isolated channels and their input and output are structured at a common point, therefore, the output load will likely result in measurement errors. PCS-1000I's isolated current output design can prevent measurement errors from an oscilloscope with non-isolated outputs. PCS-1000I, a high precision AC/DC current shunt meter, not only provides USB and GPIB communications interfaces for users to remotely control the instrument but also conducts simultaneous voltage and current measurements. The SCPI communications commands of PCS-1000I allow users to remotely control PCS-1000I via a PC to operate measurement data readbacks.



PCS-1000I high precision AC and DC shunt meter can simultaneously measure current and voltage with the maximum 6 1/2 measurement resolution. The above diagram shows the connection method of simultaneous measurement. Compared with the test of conventional meters from other brands, PCS-1000I is simple in connection and there is no requirement of any additional instrument.

Isolated Output Current Output Design

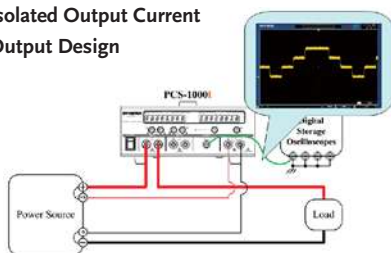


PCS-1000I adopts isolated current output design. Its BNC output can directly connect with an oscilloscope to avoid measurement errors resulted from the common ground of oscilloscope's analog input measurement.

Connection Comparison


PCS-1000I can simultaneously measure current and voltage with 6 1/2 measurement resolution. The below diagram shows the connection method of simultaneous measurement. Compared with the test of conventional meters from other brands, PCS-1000I is simple in connection and there is no requirement of any additional instrument.

PCS-1000I Conducts Simultaneous Voltage and Current Measurement




1. Only one PCS-1000I is needed to measure voltage and current
2. Easy connection
3. USB and GPIB communications on the rear panel can be used for data communication while connecting with a PC

Shunt Resistor Conducts Current and Voltage Measurement

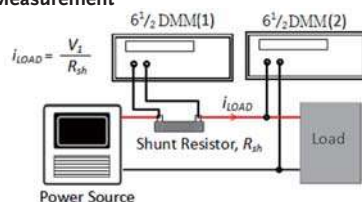

1. One voltage meter is needed to measure voltage on shunt and the voltage will be converted to current. For simultaneous voltage and current measurement, one extra voltage meter is required
2. Complex connection
3. For data communication with a PC, the PC must be connected to two voltage meters

Conventional Shunt Meter Conducts Current and Voltage Measurement

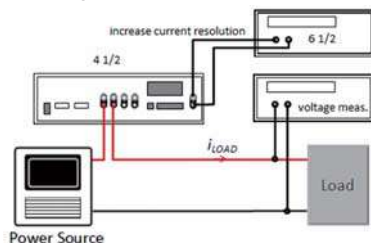

1. This method requires one shunt meter, one current meter to increase current measurement resolution, and one voltage meter to measure voltage
2. Complex connection
3. For data communication with a PC, the PC must be connected to two meters

PCS-1000I

FEATURES

- 6 1/2 Digit Voltage and Current Measurement Resolution
- Simultaneous Current and Voltage Measurement
- Five Current Measurement Levels(AC & DC) : 30mA/300mA/3A/30A/300A
- AC Voltage Measurement Levels : 200mV/2V/20V/200V/600V
- DC Voltage Measurement Levels : 200mV/2V/20V/200V/1000V
- Standard : USB & GPIB
- CE Verification



Front Panel



Rear Panel



PCS-1000I
vs. Current Probe for Measurement

APPLICATIONS

- Power Supply Analysis
- Power Supply Measurement Application
- R & D and Laboratory Application
- Quality Inspection Test
- Precision Measurement

SPECIFICATIONS

DC CHARACTERISTICS	DC Voltage	<table><tr><td>Range</td><td>1 Year 23 °C ± 5 °C</td><td colspan="2">Temperature Coefficient/°C</td></tr><tr><td>200.0000 mV</td><td>0.0050 + 0.0035</td><td colspan="2">0.0005 + 0.0005</td></tr><tr><td>2.000000 V</td><td>0.0050 + 0.0010</td><td colspan="2">0.0005 + 0.0001</td></tr><tr><td>20.00000 V</td><td>0.0050 + 0.0010</td><td colspan="2">0.0005 + 0.0001</td></tr><tr><td>200.0000 V</td><td>0.0050 + 0.0010</td><td colspan="2">0.0005 + 0.0001</td></tr><tr><td>1000.000 V</td><td>0.0050 + 0.0020</td><td colspan="2">0.0005 + 0.0001</td></tr></table>	Range	1 Year 23 °C ± 5 °C	Temperature Coefficient/°C		200.0000 mV	0.0050 + 0.0035	0.0005 + 0.0005		2.000000 V	0.0050 + 0.0010	0.0005 + 0.0001		20.00000 V	0.0050 + 0.0010	0.0005 + 0.0001		200.0000 V	0.0050 + 0.0010	0.0005 + 0.0001		1000.000 V	0.0050 + 0.0020	0.0005 + 0.0001		Accuracy specification : ±(% of reading + % of range);voltage input resistance: 10MΩ for all DC voltage ranges								
		Range	1 Year 23 °C ± 5 °C	Temperature Coefficient/°C																															
		200.0000 mV	0.0050 + 0.0035	0.0005 + 0.0005																															
		2.000000 V	0.0050 + 0.0010	0.0005 + 0.0001																															
		20.00000 V	0.0050 + 0.0010	0.0005 + 0.0001																															
	200.0000 V	0.0050 + 0.0010	0.0005 + 0.0001																																
	1000.000 V	0.0050 + 0.0020	0.0005 + 0.0001																																
	DC Current	<table><tr><td>Range</td><td>Burden Voltage</td><td>1 Year 23 °C ± 5 °C</td><td colspan="2">Temperature Coefficient/°C</td></tr><tr><td>30.00000 mA</td><td>< 0.4 V</td><td>0.01 + 0.005</td><td colspan="2">0.001 + 0.002</td></tr><tr><td>300.0000 mA</td><td>< 0.5 V</td><td>0.01 + 0.005</td><td colspan="2">0.001 + 0.002</td></tr><tr><td>3.000000 A</td><td>< 0.8 V</td><td>0.01 + 0.005</td><td colspan="2">0.001 + 0.002</td></tr><tr><td>30.00000 A*1</td><td>< 0.8 V</td><td>0.01 + 0.005</td><td colspan="2">0.001 + 0.002</td></tr><tr><td>300.0000 A*1</td><td>< 0.8 V</td><td>0.02 + 0.005</td><td colspan="2">0.001 + 0.002</td></tr></table>	Range	Burden Voltage	1 Year 23 °C ± 5 °C	Temperature Coefficient/°C		30.00000 mA	< 0.4 V	0.01 + 0.005	0.001 + 0.002		300.0000 mA	< 0.5 V	0.01 + 0.005	0.001 + 0.002		3.000000 A	< 0.8 V	0.01 + 0.005	0.001 + 0.002		30.00000 A*1	< 0.8 V	0.01 + 0.005	0.001 + 0.002		300.0000 A*1	< 0.8 V	0.02 + 0.005	0.001 + 0.002		Accuracy specification : ± (% of reading + % of range)		
		Range	Burden Voltage	1 Year 23 °C ± 5 °C	Temperature Coefficient/°C																														
		30.00000 mA	< 0.4 V	0.01 + 0.005	0.001 + 0.002																														
300.0000 mA		< 0.5 V	0.01 + 0.005	0.001 + 0.002																															
3.000000 A		< 0.8 V	0.01 + 0.005	0.001 + 0.002																															
30.00000 A*1	< 0.8 V	0.01 + 0.005	0.001 + 0.002																																
300.0000 A*1	< 0.8 V	0.02 + 0.005	0.001 + 0.002																																
Isolated DC Current Monitor Accuracy	<table><tr><td>Range</td><td>Resolution(6 1/2)</td><td>DC Accuracy</td><td colspan="2">Temperature Coefficient/°C</td></tr><tr><td>30.00000 mA</td><td>0.00001mA</td><td>0.1 + 0.05</td><td colspan="2">0.001</td></tr><tr><td>300.0000 mA</td><td>0.0001mA</td><td>0.1 + 0.05</td><td colspan="2">0.001</td></tr><tr><td>3.000000 A</td><td>0.000001A</td><td>0.1 + 0.05</td><td colspan="2">0.001</td></tr><tr><td>30.00000 A*1</td><td>0.00001A</td><td>0.1 + 0.05</td><td colspan="2">0.001</td></tr><tr><td>300.0000 A*1</td><td>0.0001A</td><td>0.2 + 0.05</td><td colspan="2">0.001</td></tr></table>	Range	Resolution(6 1/2)	DC Accuracy	Temperature Coefficient/°C		30.00000 mA	0.00001mA	0.1 + 0.05	0.001		300.0000 mA	0.0001mA	0.1 + 0.05	0.001		3.000000 A	0.000001A	0.1 + 0.05	0.001		30.00000 A*1	0.00001A	0.1 + 0.05	0.001		300.0000 A*1	0.0001A	0.2 + 0.05	0.001		Accuracy specification : ±(% of output + % of full scale);monitor output voltage for the full scale current = 3V			
	Range	Resolution(6 1/2)	DC Accuracy	Temperature Coefficient/°C																															
	30.00000 mA	0.00001mA	0.1 + 0.05	0.001																															
	300.0000 mA	0.0001mA	0.1 + 0.05	0.001																															
	3.000000 A	0.000001A	0.1 + 0.05	0.001																															
	30.00000 A*1	0.00001A	0.1 + 0.05	0.001																															
300.0000 A*1	0.0001A	0.2 + 0.05	0.001																																
AC CHARACTERISTICS	True RMS AC Voltage	<table><tr><td>Range</td><td>Frequency</td><td>1 Year 23 °C ± 5 °C</td><td colspan="2">Temperature Coefficient/°C</td></tr><tr><td>200.0000 mV</td><td rowspan="5">45Hz~2kHz 2kHz~10kHz 10kHz~20kHz</td><td rowspan="5">0.5 + 0.05 1.0 + 0.05 2.0 + 0.10</td><td colspan="2">0.005 + 0.005</td></tr><tr><td>2.000000 V</td><td colspan="2">0.005 + 0.005</td></tr><tr><td>20.00000 V</td><td colspan="2">0.005 + 0.005</td></tr><tr><td>200.0000 V</td><td colspan="2">0.005 + 0.005</td></tr><tr><td>600.000 V</td><td colspan="2">0.005 + 0.005</td></tr></table>	Range	Frequency	1 Year 23 °C ± 5 °C	Temperature Coefficient/°C		200.0000 mV	45Hz~2kHz 2kHz~10kHz 10kHz~20kHz	0.5 + 0.05 1.0 + 0.05 2.0 + 0.10	0.005 + 0.005		2.000000 V	0.005 + 0.005		20.00000 V	0.005 + 0.005		200.0000 V	0.005 + 0.005		600.000 V	0.005 + 0.005		Accuracy specification : ±(% of reading + % of range)										
		Range	Frequency	1 Year 23 °C ± 5 °C	Temperature Coefficient/°C																														
		200.0000 mV	45Hz~2kHz 2kHz~10kHz 10kHz~20kHz	0.5 + 0.05 1.0 + 0.05 2.0 + 0.10	0.005 + 0.005																														
		2.000000 V			0.005 + 0.005																														
		20.00000 V			0.005 + 0.005																														
		200.0000 V			0.005 + 0.005																														
	600.000 V	0.005 + 0.005																																	
	True RMS AC Current	<table><tr><td>Range</td><td>Frequency</td><td>1 Year 23 °C ± 5 °C</td><td colspan="2">Temperature Coefficient/°C</td></tr><tr><td>30.00000 mA</td><td rowspan="3">45Hz~2kHz 2kHz~10kHz</td><td rowspan="3">0.5 + 0.05 1.0 + 0.05</td><td colspan="2">0.03 + 0.006</td></tr><tr><td>300.0000 mA</td><td colspan="2">0.03 + 0.006</td></tr><tr><td>3.000000 A</td><td colspan="2">0.03 + 0.006</td></tr><tr><td>30.00000 A*1</td><td rowspan="2">45Hz~400Hz</td><td rowspan="2">0.5 + 0.05</td><td colspan="2">0.03 + 0.006</td></tr><tr><td>300.0000 A*1</td><td colspan="2">0.03 + 0.006</td></tr></table>	Range	Frequency	1 Year 23 °C ± 5 °C	Temperature Coefficient/°C		30.00000 mA	45Hz~2kHz 2kHz~10kHz	0.5 + 0.05 1.0 + 0.05	0.03 + 0.006		300.0000 mA	0.03 + 0.006		3.000000 A	0.03 + 0.006		30.00000 A*1	45Hz~400Hz	0.5 + 0.05	0.03 + 0.006		300.0000 A*1	0.03 + 0.006		Accuracy specification : ±(% of reading + % of range)								
		Range	Frequency	1 Year 23 °C ± 5 °C	Temperature Coefficient/°C																														
		30.00000 mA	45Hz~2kHz 2kHz~10kHz	0.5 + 0.05 1.0 + 0.05	0.03 + 0.006																														
300.0000 mA		0.03 + 0.006																																	
3.000000 A		0.03 + 0.006																																	
30.00000 A*1	45Hz~400Hz	0.5 + 0.05	0.03 + 0.006																																
300.0000 A*1			0.03 + 0.006																																
Isolated AC Current Monitor Accuracy	<table><tr><td>Range</td><td>Frequency</td><td>AC Accuracy</td><td colspan="2">Temperature Coefficient/°C</td></tr><tr><td>30.00000 mA</td><td rowspan="2">45Hz~2kHz 2kHz~10kHz</td><td rowspan="2">0.2 + 0.05 0.5 + 0.05</td><td colspan="2">0.001</td></tr><tr><td>300.0000 mA</td><td colspan="2">0.001</td></tr><tr><td>3.000000 A</td><td rowspan="3">45Hz~400Hz</td><td rowspan="3">0.5 + 0.05</td><td colspan="2">0.001</td></tr><tr><td>30.00000 A*1</td><td colspan="2">0.001</td></tr><tr><td>300.0000 A*1</td><td colspan="2">0.001</td></tr></table>	Range	Frequency	AC Accuracy	Temperature Coefficient/°C		30.00000 mA	45Hz~2kHz 2kHz~10kHz	0.2 + 0.05 0.5 + 0.05	0.001		300.0000 mA	0.001		3.000000 A	45Hz~400Hz	0.5 + 0.05	0.001		30.00000 A*1	0.001		300.0000 A*1	0.001		Accuracy specification : ±(% of output + % of full scale); monitor output voltage for the full scale current = 3V; The specifications are only applicable when the input is 10% or greater of the full scale range									
	Range	Frequency	AC Accuracy	Temperature Coefficient/°C																															
	30.00000 mA	45Hz~2kHz 2kHz~10kHz	0.2 + 0.05 0.5 + 0.05	0.001																															
	300.0000 mA			0.001																															
	3.000000 A	45Hz~400Hz	0.5 + 0.05	0.001																															
30.00000 A*1	0.001																																		
300.0000 A*1	0.001																																		
GENERAL	Power Supply	100 V/120 V/220 V/240 V ±10%																																	
	Power Line Frequency	50/60 Hz																																	
	Operating Environment	Full accuracy for 0 °C ~ 55 °C , Full accuracy to 80% R.H. at 40 °C																																	
	Storage Environment	-40 °C ~ 70 °C																																	
	Power Consumption	Max 35VA																																	
Dimensions Weight	210(W) x 80(H) x 390(D)mm ; Approx. 5 kg																																		

(The specifications apply when the PCS-1000I is powered on for at least 30 minutes to warm-up to a temperature of 18 °C ~ 28 °C, unless specified otherwise.)

Note: *1 The accuracy for 30A/300A levels must be increased by a power factor of 8 ppm/watt.

Specifications subject to change without notice.

CS1000GD1DH

ORDERING INFORMATION

PCS-1000I Isolated Output High Precision Current Shunt Meter

ACCESSORIES

Quick Operation Guide, User Manual (CD) x 1, AC Power Cord x 1 (Region Dependant),

GTL-105A Alligator Clip Test Lead (3A Max)

GTL-240 USB Cable

GTL-207 Banana Plug Test Lead

PCS-001 Basic Accessory Kit

OPTIONAL ASSESSORIES

GRA-419-J Rack Mount Adapter (JIS)

GRA-419-E Rack Mount Adapter (EIA)

Global Headquarters

GOOD WILL INSTRUMENT CO., LTD.

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan

T +886-2-2268-0389 F +886-2-2268-0639

E-mail: marketing@goodwill.com.tw

China Subsidiary

GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.

No. 521, Zhujiang Road, Snd, Suzhou Jiangsu 215011 China

T +86-512-6661-7177 F +86-512-6661-7277

E-mail: marketing@instek.com.cn

Malaysia Subsidiary

GOOD WILL INSTRUMENT (M) SDN. BHD.

No. 1-3-18, Elit Avenue, Jalan Mayang Pasir 3,

11950 Bayan Baru, Penang, Malaysia

T +604-6111122 F +604-6115225

E-mail: sales@goodwill.com.my

Europe Subsidiary

GOOD WILL INSTRUMENT EURO B.V.

De Run 5427A, 5504DG Veldhoven, THE NETHERLANDS

T +31 (0)40-2557790 F +31 (0)40-2541194

U.S.A. Subsidiary

INSTEK AMERICA CORP.

5198 Brooks Street Montclair, CA 91763, U.S.A.

T +1-909-399-3535 F +1-909-399-0819

E-mail: sales@instekamerica.com

Japan Subsidiary

TEXIO TECHNOLOGY CORPORATION.

7F Towa Fudosan Shin Yokohama Bldg., 2-18-13 Shin

Yokohama, Kohoku-ku, Yokohama, Kanagawa,

222-0033 Japan

T +81-45-620-2305 F +81-45-534-7181

E-mail: info@texio.co.jp

Korea Subsidiary

GOOD WILL INSTRUMENT KOREA CO., LTD.

Room No.503, Gyeonginro 775 (Mulla-Dong 3Ga,

Ace Hightech-City B/D 1Dong), Yeongduengpo-Gu,

Seoul 150093, Korea.

T +82-2-3439-2205 F +82-2-3439-2207

E-mail: gwinstek@gwinstek.co.kr

GW INSTEK

Simply Reliable



www.gwinstek.com



www.facebook.com/GWInstek