



RIGOL

# MHO900 Series

Digital Oscilloscope

Data Sheet  
DSA46102-1110  
Sept. 2025

# MHO900 Series

## Digital Oscilloscope


Exquisite Appearance, Abundant Functions

7-inch capacitive touch screen



16 Digital Channels

4 Analog Channels

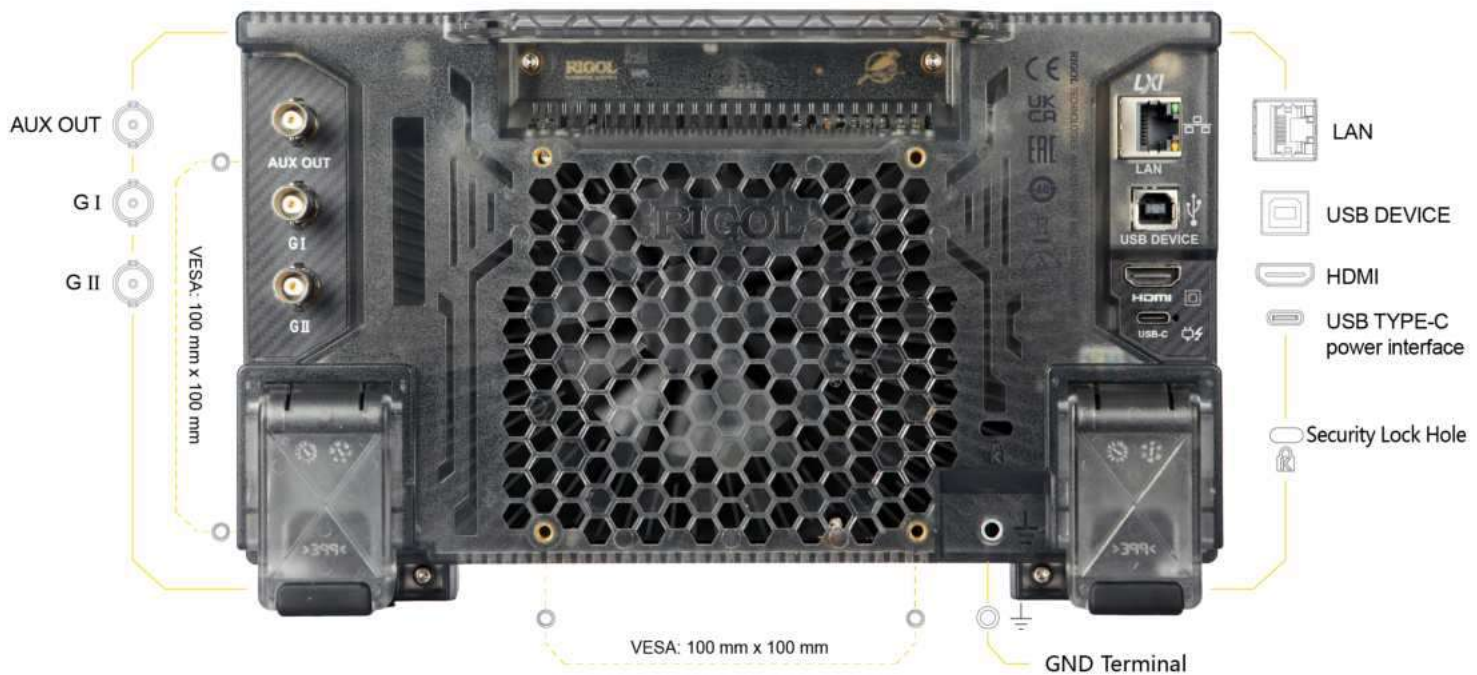

265.35 mm (W) × 161.75 mm (H) × 77.38 mm (D)

## Application



### Power Supply Test

- Loop Response Analysis
- Ripple and Noise Test
- Transient Response Test



### Embedded System Debugging

- Serial Protocol Analysis
- Digital Signal Analysis



### Auto Electronics Test

- Automobile Bus Debugging
- Sensor Test



### Basic Experiment

- Analog Circuit Experiment
- High-Frequency Circuit Experiment
- Power and Electronics Experiment

## High Performance Rebuilds the Entry-Level Standard

- 800 MHz BW & 4 GSa/s sample rate enable you to address the high-speed signal acquisition challenge.
- 12-bit high-precision ADC, 4096 vertical digitalizing levels, not missing any weak signals.
- Max. 500 Mpts memory depth enables you to record high-speed and complex events, giving you full insight into the full details of high-speed signals.
- Various protocol decodings



## N-in-one Integrated Efficient Test Tool

- Standard 16 digital channels allows you to capture and analyze the digital signals together with the analog signals.
- Optional 2-channel, 100 MHz AFG option can output up to 100 MHz pure sine wave, with Bode plot supported for signal analysis.



# Product Features

## Product Features

- 12-bit resolution
- Max. 800 MHz analog bandwidth, 4 analog channels
- 16 digital channels, 200 MHz PLA2216 logic analyzer probe (opt.)
- Real-time sample rate: up to 4 GSa/s
- Max. memory depth of 500 Mpts (option)
- Vertical sensitivity 200  $\mu$ V/div to 10 V/div
- Max. waveform capture rate: 1,000,000 wfms/s<sup>[1]</sup>
- Digital phosphor display with real-time 256-level intensity grading
- Optional 2-channel, 50 MHz/100 MHz Function/Arbitrary Waveform Generator (Bode plot supported)
- Supports histogram, digital signal analysis, etc.
- Supports waveform search and navigation function, capable of debugging the signal anomalies faster
- 7" (1024x600) HD touch screen
- Flex knob brings user-friendly experience
- Standard USB2.0 Device & Host, LAN (100M), and HDMI interfaces
- Novel and delicate industrial design, easy to operate
- Supports online upgrade of software version

MHO900 series is RIGOL's new launched economical oscilloscope. Compact in size, it features 1,000,000 wfms/s<sup>[1]</sup> capture rate, max. memory depth of 500 Mpts (option), 12-bit high resolution and low noise.

The product supports 16 digital channels. One instrument can make an analysis on both the analog and digital signals to meet the embedded design and test scenarios. With an affordable price equivalent to purchasing an entry-level instrument, you can access the auto serial and parallel bus analysis, bode plot analysis, and other functions to meet the test demands in the R&D, education, and scientific research fields.

## NOTE:

[1]: Single-channel mode, recording mode, 20 ns/div, 1 kpts memory depth (or Auto memory depth).

# RIGOL Probes and Accessories Supported

| Model                                                                                              | Type                         | Description                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Passive Probe</b>                                                                               |                              |                                                                                                                                                                                                                                                                                                           |
|  <p>PVP2150</p>   | Passive High-impedance Probe | <ul style="list-style-type: none"> <li>Attenuation Ratio: 10:1/1:1</li> <li>1X BW: DC to 35 MHz</li> <li>10X BW: DC to 150 MHz</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                                                                             |
|  <p>PVP2350</p>   | Passive High-impedance Probe | <ul style="list-style-type: none"> <li>Attenuation Ratio: 10:1/1:1</li> <li>1X BW: DC to 35 MHz</li> <li>10X BW: DC to 350 MHz</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                                                                             |
|  <p>PVP3150</p> | Passive High-impedance Probe | <ul style="list-style-type: none"> <li>Attenuation Ratio: 10:1/1:1</li> <li>1X BW: DC to 20 MHz</li> <li>10X BW: DC to 150 MHz</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                                                                             |
|  <p>RP3500A</p> | Passive Probe                | <ul style="list-style-type: none"> <li>Attenuation Ratio: 10:1</li> <li>BW: DC to 500 MHz</li> <li>Compatibility: MSO/DS7000, MSO8000/A, DHO4000/1000, MHO/DHO5000, MHO2000, DS70000/80000, MHO98, and MHO900 series</li> </ul>                                                                           |
| <b>High-voltage Single-ended Probe</b>                                                             |                              |                                                                                                                                                                                                                                                                                                           |
|  <p>RP1010H</p> | High-voltage Probe           | <ul style="list-style-type: none"> <li>Attenuation Ratio: 1000:1</li> <li>BW: DC to 40 MHz</li> <li>DC: 0 to 10 kV DC</li> <li>AC: pulse <math>\leq 20</math> kVp-p</li> <li>AC: sine <math>\leq 7</math> kV<sub>rms</sub></li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul> |

| Model                                                                                              | Type                            | Description                                                                                                                                                                                                                                                    |
|----------------------------------------------------------------------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>RP1018H</p>   | High-voltage Probe              | <ul style="list-style-type: none"> <li>Attenuation Ratio: 1000:1</li> <li>BW: DC to 150 MHz</li> <li>DC+AC<sub>peak</sub>: 18 kV CAT II</li> <li>AC<sub>rms</sub>: 12 kV CAT II</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul> |
|  <p>RP1300H</p>   | High-voltage Probe              | <ul style="list-style-type: none"> <li>Attenuation Ratio: 100:1</li> <li>BW: DC to 300 MHz</li> <li>CAT I 2000 V (DC+AC)</li> <li>CAT II 1500 V (DC+AC)</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                         |
| <b>High-voltage Differential Probe</b>                                                             |                                 |                                                                                                                                                                                                                                                                |
|  <p>PHA0150</p>  | High-voltage Differential Probe | <ul style="list-style-type: none"> <li>BW: DC to 70 MHz</li> <li>Max. voltage ≤ 1500 Vpp</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                                                                        |
|  <p>PHA1150</p> | High-voltage Differential Probe | <ul style="list-style-type: none"> <li>BW: DC to 100 MHz</li> <li>Max. voltage ≤ 1500 Vpp</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                                                                       |
|  <p>PHA2150</p> | High-voltage Differential Probe | <ul style="list-style-type: none"> <li>50X BW: DC to 160 MHz</li> <li>500X BW: DC to 200 MHz</li> <li>Max. voltage ≤ 1500 Vpp</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                                   |
|  <p>RP1025D</p> | High-voltage Differential Probe | <ul style="list-style-type: none"> <li>BW: DC to 25 MHz</li> <li>Max. voltage ≤ 1400 Vpp (DC + AC P-P)</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                                                          |
|  <p>RP1050D</p> | High-voltage Differential Probe | <ul style="list-style-type: none"> <li>BW: DC to 50 MHz</li> <li>Max. voltage ≤ 7000 Vpp (DC + AC P-P)</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                                                          |

| Model                                                                                          | Type                            | Description                                                                                                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>RP1100D   | High-voltage Differential Probe | <ul style="list-style-type: none"> <li>BW: DC to 100 MHz</li> <li>Max. voltage <math>\leq 7000</math> Vpp (DC + AC P-P)</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                                             |
| <b>Current Probe</b>                                                                           |                                 |                                                                                                                                                                                                                                                                    |
| <br>RP1001C   | Current Probe                   | <ul style="list-style-type: none"> <li>BW: DC to 300 kHz</li> <li>Maximum Input<br/>DC: <math>\pm 100</math> A<br/>AC P-P: 200 A<br/>AC RMS: 70 A</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                   |
| <br>RP1002C  | Current Probe                   | <ul style="list-style-type: none"> <li>BW: DC to 1 MHz</li> <li>Maximum Input<br/>DC: <math>\pm 70</math> A<br/>AC P-P: 140 A<br/>AC RMS: 50 A</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> </ul>                                      |
| <br>RP1003C | Current Probe                   | <ul style="list-style-type: none"> <li>BW: DC to 50 MHz</li> <li>Maximum Input<br/>AC P-P: 50 A (non-continuous)<br/>AC RMS: 30 A</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> <li>Required to order RP1000P power supply.</li> </ul>  |
| <br>RP1004C | Current Probe                   | <ul style="list-style-type: none"> <li>BW: DC to 100 MHz</li> <li>Maximum Input<br/>AC P-P: 50 A (non-continuous)<br/>AC RMS: 30 A</li> <li>Compatibility: All models of RIGOL's digital oscilloscopes</li> <li>Required to order RP1000P power supply.</li> </ul> |

| Model                                                                                          | Type                 | Description                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------------------------------------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>RP1005C   | Current Probe        | <ul style="list-style-type: none"> <li>• BW: DC to 10 MHz</li> <li>• Maximum Input<br/>AC P-P: 300 A (non-continuous), 500 A (@pulse width <math>\leq 30</math> us)</li> <li>• AC RMS: 150 A</li> <li>• Compatibility: All models of RIGOL's digital oscilloscopes</li> <li>• Required to order RP1000P power supply.</li> </ul> |
| <br>RP1006C   | Current Probe        | <ul style="list-style-type: none"> <li>• BW: DC to 2 MHz</li> <li>• Maximum Input<br/>AC P-P: 700 A peaks, non-continuous</li> <li>• AC RMS: 500 A</li> <li>• Compatibility: All models of RIGOL's digital oscilloscopes</li> <li>• Required to order RP1000P power supply.</li> </ul>                                           |
| <br>RP1000P  | 4-CH Power Supply    | Power supply for RP1003C, RP1004C, RP1005C, and RP1006C; supporting 4 channels.                                                                                                                                                                                                                                                  |
| <b>Logic Analyzer Probe</b>                                                                    |                      |                                                                                                                                                                                                                                                                                                                                  |
| <br>PLA2216 | Logic Analyzer Probe | MSO5000, DHO900, MHO900 series, MHO98 dedicated logic analyzer probe.                                                                                                                                                                                                                                                            |

# Specifications

All the specifications are guaranteed except the parameters marked with "Typical" and the oscilloscope needs to operate for more than 30 minutes under the specified operation temperature. All the specifications are measured when the oscilloscope is grounded properly.

## Overview of the MHO900 Technical Specifications

### Technical Specifications

| Model                                                       | MHO984                                                                                                          | MHO954                                                                                                          | MHO934                               |
|-------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|--------------------------------------|
| Max. Analog Bandwidth (50 $\Omega$ , -3 dB)                 | 800 MHz (single-channel <sup>[1]</sup> & half-channel <sup>[2]</sup> )<br>400 MHz (all-channel <sup>[3]</sup> ) | 500 MHz (single-channel <sup>[1]</sup> & half-channel <sup>[2]</sup> )<br>400 MHz (all-channel <sup>[3]</sup> ) | 350 MHz (for any number of channels) |
| Max. Analog Bandwidth (1 M $\Omega$ , -3 dB)                | 500 MHz (single-channel <sup>[1]</sup> & half-channel <sup>[2]</sup> )<br>400 MHz (all-channel <sup>[3]</sup> ) | 500 MHz (single-channel <sup>[1]</sup> & half-channel <sup>[2]</sup> )<br>400 MHz (all-channel <sup>[3]</sup> ) | 350 MHz (for any number of channels) |
| Calculated Rising Time under 50 $\Omega$ (10%-90%, typical) | 437 ps                                                                                                          | 700 ps                                                                                                          | 1 ns                                 |
| No. of Analog Channels                                      | 4                                                                                                               |                                                                                                                 |                                      |
| Function/Arbitrary Waveform Generator (AFG) <sup>[4]</sup>  | 2-Channel, 100 MHz, 1 GSa/s (Opt.)<br>2-Channel, 50 MHz, 1 GSa/s (Opt.)                                         |                                                                                                                 |                                      |
| Bode Plot <sup>[5]</sup>                                    | Sweep Range: 10 Hz to 30 MHz                                                                                    |                                                                                                                 |                                      |

### General Specifications

| Specification              | Specification                                                                                                               |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Sampling Mode              | Real-time Sampling                                                                                                          |
| Max. Real-time Sample Rate | 4 GSa/s (single-channel <sup>[1]</sup> )<br>2 GSa/s (half-channel <sup>[2]</sup> )<br>1 GSa/s (all-channel <sup>[3]</sup> ) |

| Specification                                     | Specification                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Max. Memory Depth                                 | Standard: 100 Mpts (single-channel <sup>[1]</sup> ); 50 Mpts (half-channel <sup>[2]</sup> ); 25 Mpts (all-channel <sup>[3]</sup> )<br>Optional: with 500 Mpts memory depth option installed, 500 Mpts (single-channel <sup>[1]</sup> ); 250 Mpts (half-channel <sup>[2]</sup> ); 125 Mpts (all-channel <sup>[3]</sup> ) |
| Input Impedance                                   | 50 $\Omega$ $\pm$ 1%, 1 M $\Omega$ $\pm$ 1%                                                                                                                                                                                                                                                                             |
| Max. Waveform Capture Rate                        | 30,000 wfms/s (in Vector mode)<br>1,000,000 wfms/s <sup>[6]</sup> (in fast recording mode)                                                                                                                                                                                                                              |
| Vertical Resolution                               | 12-bit (4,096 digitalizing levels)                                                                                                                                                                                                                                                                                      |
| Hardware Real-time Waveform Recording and Playing | Max. 500,000 frames                                                                                                                                                                                                                                                                                                     |
| Peak Detection                                    | Captures 500 ps glitches                                                                                                                                                                                                                                                                                                |
| LCD Size and Type                                 | 7-inch multi-touch screen, gesture enabled operation                                                                                                                                                                                                                                                                    |
| Display Resolution                                | 1024*600 (16:9)                                                                                                                                                                                                                                                                                                         |
| Communication Interface                           | HDMI, LAN (100M), USB2.0 Host&Device                                                                                                                                                                                                                                                                                    |
| Programming Standard                              | Supports standard SCPI instruction sets                                                                                                                                                                                                                                                                                 |
| Digital Phosphor Display                          | 256-level intensity grading                                                                                                                                                                                                                                                                                             |

## Vertical System Analog Channel

| Vertical System Analog Channel |                                                                                                                                                                                                                 |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input Coupling                 | DC, AC, or GND                                                                                                                                                                                                  |
| Input Impedance                | 1 M $\Omega$ $\pm$ 1%<br>50 $\Omega$ $\pm$ 1%                                                                                                                                                                   |
| Input Capacitance              | 18 pF $\pm$ 3 pF                                                                                                                                                                                                |
| Probe Attenuation Coefficient  | 0.001X, 0.002X, 0.001X, 0.002X, 0.005X, 0.01X, 0.02X, 0.05X, 0.1X, 0.2X, 0.5X, 1X, 2X, 5X, 10X, 15X, 20X, 50X, 100X, 150X, 200X, 500X, 1000X, 1500X, 2000X, 5000X, 10000X, 15000X, 20000X, 50000X; user-defined |

## Vertical System Analog Channel

|                                                          |         |                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                          |         | 1 M $\Omega$ : CAT I 300 V <sub>rms</sub> , 400 V <sub>pk</sub> (DC + V <sub>peak</sub> )<br>50 $\Omega$ : 5 V <sub>rms</sub>                                                                                                                                                                                              |
| Maximum Input Voltage                                    | Remarks | Whether the probe is used, the 50 $\Omega$ or 1 M $\Omega$ route does not allow transient overvoltage to occur.<br>Please use the instrument dedicated for the specified measurement category (not applicable to CAT II, III, and IV)                                                                                      |
| Vertical Resolution                                      |         | 12-bit (up to 16-bit in high resolution mode)                                                                                                                                                                                                                                                                              |
| Effective Number of Bits (ENOB) (typical) <sup>[7]</sup> |         | MHO984: 8<br>MHO954: 8.1<br>MHO934: 8.5                                                                                                                                                                                                                                                                                    |
| Vertical Sensitivity Range <sup>[8]</sup>                |         | 50 $\Omega$ : 200 $\mu$ V/div to 1 V/div<br>1 M $\Omega$ : 1 mV/div to 10 V/div                                                                                                                                                                                                                                            |
| Offset Range                                             |         | 1 M $\Omega$ :<br>$\pm 1$ V ( $\geq 1$ mV/div, $\leq 65$ mV/div)<br>$\pm 10$ V ( $> 65$ mV/div, $\leq 274$ mV/div)<br>$\pm 20$ V ( $> 274$ mV/div, $\leq 2.79$ V/div)<br>$\pm 100$ V ( $> 2.79$ V/div, $\leq 10$ V/div)<br>50 $\Omega$ :<br>$\pm 1$ V ( $\geq 1$ mV/div, $\leq 136$ mV/div)<br>$\pm 4$ V ( $> 136$ mV/div) |
| Dynamic Range                                            |         | $\pm 4$ div                                                                                                                                                                                                                                                                                                                |
| Bandwidth Limit (Typical)                                |         | 20 MHz, 250 MHz, FULL                                                                                                                                                                                                                                                                                                      |
| DC Gain Accuracy <sup>[8]</sup>                          |         | $\pm 1\%$ ( $\geq 5$ mV/div)<br>$\pm 2\%$ ( $< 5$ mV/div)                                                                                                                                                                                                                                                                  |
| DC Offset Accuracy                                       |         | $\leq 200$ mV/div ( $\pm 0.1$ div $\pm 2$ mV $\pm 1.5\%$ of offset value)<br>$> 200$ mV/div ( $\pm 0.1$ div $\pm 2$ mV $\pm 1.0\%$ of offset value)                                                                                                                                                                        |
| Channel-to-Channel Isolation                             |         | $\geq 100:1$ (DC to full bandwidth)                                                                                                                                                                                                                                                                                        |
| ESD Tolerance                                            |         | $\pm 8$ kV                                                                                                                                                                                                                                                                                                                 |

## Vertical System Digital Channel

### Vertical System Digital Channel

|                          |                                                              |
|--------------------------|--------------------------------------------------------------|
| Number of Channels       | 16 input channels (D0 to D15)<br>(D0 to D7, D8 to D15)       |
| Threshold Range          | $\pm 15.0$ V, in 10 mV step                                  |
| Threshold Accuracy       | $\pm (100.00 \text{ mV} + 3\% \text{ of threshold setting})$ |
| Threshold Selection      | User (adjustable threshold for 8 channels in a group)        |
| Max. Input Voltage       | $\pm 40$ V peak CAT I; transient overvoltage 800 Vpk         |
| Max. Input Dynamic Range | $\pm 10$ V + threshold                                       |
| Minimum Voltage Swing    | 500 mVpp                                                     |
| Input Impedance          | About 101 k $\Omega$                                         |
| Probe Load               | $\approx 8$ pF                                               |
| Vertical Resolution      | 1-bit                                                        |

## Noise Floor

### Noise Floor at 50 $\Omega$ (800 MHz BW)

|                                                 |                                  |
|-------------------------------------------------|----------------------------------|
| 200 $\mu\text{V}/\text{div}$ (20 MHz BW Limit)  | 66 $\mu\text{V}_{\text{rms}}$    |
| 500 $\mu\text{V}/\text{div}$ (250 MHz BW Limit) | 74.4 $\mu\text{V}_{\text{rms}}$  |
| 1 mV/div                                        | 139.2 $\mu\text{V}_{\text{rms}}$ |
| 2 mV/div                                        | 136.8 $\mu\text{V}_{\text{rms}}$ |
| 5 mV/div                                        | 145.2 $\mu\text{V}_{\text{rms}}$ |
| 10 mV/div                                       | 406.8 $\mu\text{V}_{\text{rms}}$ |
| 20 mV/div                                       | 465.6 $\mu\text{V}_{\text{rms}}$ |
| 50 mV/div                                       | 694.8 $\mu\text{V}_{\text{rms}}$ |
| 100 mV/div                                      | 1152 $\mu\text{V}_{\text{rms}}$  |
| 200 mV/div                                      | 4.92 mV $_{\text{rms}}$          |

### Noise Floor at 50 $\Omega$ (800 MHz BW)

|            |                         |
|------------|-------------------------|
| 500 mV/div | 7.2 mV <sub>rms</sub>   |
| 1 V/div    | 11.52 mV <sub>rms</sub> |

### Noise Floor at 1 M $\Omega$ (500 MHz BW)

|            |                              |
|------------|------------------------------|
| 1 mV/div   | 130.8 $\mu$ V <sub>rms</sub> |
| 2 mV/div   | 127.2 $\mu$ V <sub>rms</sub> |
| 5 mV/div   | 160 $\mu$ V <sub>rms</sub>   |
| 10 mV/div  | 270 $\mu$ V <sub>rms</sub>   |
| 20 mV/div  | 331.2 $\mu$ V <sub>rms</sub> |
| 50 mV/div  | 614.4 $\mu$ V <sub>rms</sub> |
| 100 mV/div | 3 mV <sub>rms</sub>          |
| 200 mV/div | 3.6 mV <sub>rms</sub>        |
| 500 mV/div | 12.84 mV <sub>rms</sub>      |
| 1 V/div    | 16.08 mV <sub>rms</sub>      |
| 2 V/div    | 24.36 mV <sub>rms</sub>      |
| 5 V/div    | 117.84 mV <sub>rms</sub>     |
| 10 V/div   | 156.36 mV <sub>rms</sub>     |

## Horizontal System--Analog Channel

### Horizontal System--Analog Channel

|                      |                                |
|----------------------|--------------------------------|
| Range of Time Base   | 500 ps/div to 500 s/div        |
|                      | Fine adjustment supported      |
| Time Base Resolution | 100 ps                         |
| Time Base Accuracy   | $\pm 1.5$ ppm $\pm 1$ ppm/year |

## Horizontal System--Analog Channel

|                                                          |                                                                                                                 |                                                                                                                     |
|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Time Base Delay Range                                    | Pre-trigger                                                                                                     | -5 div                                                                                                              |
|                                                          | Post-trigger                                                                                                    | 1 s or 100 div, whichever is greater                                                                                |
| Delta Time Accuracy                                      | $\pm(\text{Time Base Accuracy} \times \text{Readout}) \pm (0.001 \times \text{Screen Width}) \pm 20 \text{ ps}$ |                                                                                                                     |
| Channel-to-Channel Skew Correction                       | Channel-to-Channel Skew Correction Range $\pm 100 \text{ ns}$ , Accuracy $\pm 1 \text{ ps}$                     |                                                                                                                     |
| Analog Channel-to-Channel Delay (Typical) <sup>[9]</sup> | $\leq 200 \text{ ps}$                                                                                           |                                                                                                                     |
| Horizontal Mode                                          | YT                                                                                                              | Default                                                                                                             |
|                                                          | XY                                                                                                              | Channel 1/2/3/4                                                                                                     |
|                                                          | SCAN                                                                                                            | Time base $\geq 200 \text{ ms/div}$                                                                                 |
|                                                          | ROLL                                                                                                            | Time base $\geq 50 \text{ ms/div}$ , available to enter or exit the ROLL mode by rotating the Horizontal SCALE knob |

## Horizontal System--Digital Channel

### Horizontal System--Digital Channel

|                                                   |                                                                                                                                                                                                     |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Min. Detectable Pulse Width                       | 5 ns                                                                                                                                                                                                |
| Maximum Input Frequency                           | 200 MHz (accurately copied as the sine wave of the maximum frequency of the logic square wave; input amplitude is the minimum swing; the shortest the ground cable is required for the logic probe) |
| Channel-to-Channel Skew (Typical) <sup>[10]</sup> | $\pm 5 \text{ ns}$                                                                                                                                                                                  |

## Acquisition System

### Acquisition System

|                                    |                                                                                                                         |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Max. Sample Rate of Analog Channel | 4 GSa/s (single-channel <sup>[1]</sup> ), 2 GSa/s (half-channel <sup>[2]</sup> ), 1 GSa/s (all-channel <sup>[3]</sup> ) |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------|

## Acquisition System

|                                     |                                                                                                                                                                                                                                                                                                                         |                                                     |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| Max. Memory Depth of Analog Channel | Standard: 100 Mpts (single-channel <sup>[1]</sup> ); 50 Mpts (half-channel <sup>[2]</sup> ); 25 Mpts (all-channel <sup>[3]</sup> )<br>Optional: with 500 Mpts memory depth option installed, 500 Mpts (single-channel <sup>[1]</sup> ); 250 Mpts (half-channel <sup>[2]</sup> ); 125 Mpts (all-channel <sup>[3]</sup> ) |                                                     |
| Acquisition Mode                    | Normal                                                                                                                                                                                                                                                                                                                  | Default                                             |
|                                     | Peak Detection                                                                                                                                                                                                                                                                                                          | Captures 500 ps glitches                            |
|                                     | Average Mode                                                                                                                                                                                                                                                                                                            | 2, 4, 8, 16...65536 are available for you to choose |
|                                     | High Resolution                                                                                                                                                                                                                                                                                                         | 14-bit, 16-bit                                      |

## Trigger System

### Trigger System

|                     |                                                                                     |                                                                |
|---------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Trigger Source      | Analog channels (CH1-CH4), digital channels (D0-D15)                                |                                                                |
| Trigger Mode        | Auto, Normal, Single                                                                |                                                                |
| Trigger Coupling    | DC                                                                                  | DC coupling trigger                                            |
|                     | AC                                                                                  | AC coupling trigger                                            |
|                     | High Frequency Rejection                                                            | Cut-off frequency to 200 kHz $\pm$ 20% (internal trigger only) |
|                     | Low Frequency Rejection                                                             | Cut-off frequency to 180 kHz $\pm$ 20% (internal trigger only) |
| Noise Reject        | Increases delay for the trigger circuit (internal trigger only), On/Off             |                                                                |
| Holdoff Range       | 8 ns to 10 s                                                                        |                                                                |
| Trigger Bandwidth   | Internal trigger: analog bandwidth of the oscilloscope                              |                                                                |
| Trigger Sensitivity | Internal trigger: 0.5 div, $\geq$ 50 mV/div; 0.7 div (with noise rejection enabled) |                                                                |

## Trigger System

Trigger Level Range Internal trigger:  $\pm 4$  div from the center of the screen

## Trigger Type

### Trigger Type

|              |                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Trigger Type | Standard: Edge trigger, Pulse trigger, Slope trigger, Video trigger, Pattern trigger, Duration trigger, Timeout trigger, Runt trigger, Window trigger, Delay trigger, Setup/Hold trigger, Nth Edge trigger, RS232, I2C, SPI, CAN, LIN<br>Option: FlexRay, I2S, and MIL-STD-1553                                                                                                     |
| Edge         | Triggers on the threshold of the specified edge of the input signal. The edge types can be Rising, Falling, or Either.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                                                                                                                                                                                                     |
| Pulse        | Triggers on the positive or negative pulse with a specified width. The pulse width is greater or smaller than a certain value or within a certain time range.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                                                                                                                                                              |
| Slope        | Triggers on the positive or negative slope of the specified time. The slew time is greater or smaller than a certain value or within a certain time range.<br>Source channel: CH1 to CH4                                                                                                                                                                                            |
| Video        | Triggers on all lines, specified line, odd field, or even field that conforms to the video standards. The supported video standards include NTSC, PAL/SECAM, 480p/60Hz, 576p/50Hz, 720p/60Hz, 720p/50Hz, 720p/30Hz, 720p/25Hz, 720p/24Hz, 1080p/60Hz, 1080p/50Hz, 1080p/30Hz, 1080p/25Hz, 1080p/24Hz, 1080i/60Hz, and 1080i/50Hz.<br>Source channel: CH1 to CH4                     |
| Pattern      | Identifies a trigger condition by searching for a specified pattern. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, X, Rising, or Falling.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                                                                                                                  |
| Duration     | Triggers when the specified pattern meets the specified duration condition. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, and X. The duration is greater or smaller than a certain value, or within a certain time range, or outside a certain time range.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup> |
| Timeout      | Triggers when duration of a certain event exceeds the specified time. The event can be specified as Rising, Falling, or Either.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                                                                                                                                                                                            |

| Trigger Type |                                                                                                                                                                                                                                                                                                                                                                    |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Runt         | <p>Triggers when the pulses pass through one threshold but fail to pass through another threshold.</p> <p>Source channel: CH1 to CH4</p>                                                                                                                                                                                                                           |
| Window       | <p>Triggers in a specified window state when the rising edge of the signal crosses the upper threshold or the falling edge crosses the lower threshold. The window state can be Enter, Exit, or Time.</p> <p>Source channel: CH1 to CH4</p>                                                                                                                        |
| Delay        | <p>Triggers when the time difference between the specified edges of Source A and Source B meets the preset time. The duration is greater or smaller than a certain value, or within a certain time range, or outside a certain time range.</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p>                                                         |
| Setup/Hold   | <p>When the setup time or hold time between the input clock signal and the data signal is smaller than the specified time.</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p>                                                                                                                                                                         |
| Nth Edge     | <p>Triggers on the Nth edge that appears after the specified idle time. The edge can be specified as Rising or Falling.</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p>                                                                                                                                                                            |
| RS232/UART   | <p>Triggers on the Start, Error, Check Error, or Data frame of the RS232/UART bus (up to 20 Mb/s).</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p>                                                                                                                                                                                                 |
| I2C          | <p>Triggers on the Start, Stop, Restart, MissedACK, Address (7 bits, 8 bits, or 10 bits), Data, or Address Data of the I2C bus.</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p>                                                                                                                                                                    |
| SPI          | <p>Triggers on the specified pattern of the specified data width (4~32) of SPI bus. CS and Timeout are supported.</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p>                                                                                                                                                                                  |
| CAN          | <p>Triggers on the start of a frame, end of a frame, Remote ID, Overload, Frame ID, Frame Data, Data&amp;ID, Frame Error, Answer Error, Check Error, Format Error, Bit Fill, and Random of the CAN signal (up to 5Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF.</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p> |
| LIN          | <p>Triggers on the Sync, ID, Data (length settable), Data&amp;ID, Wakeup, Sleep, and Error of the LIN bus signal (up to 20 Mb/s).</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p>                                                                                                                                                                  |

| Trigger Type           |                                                                                                                                                                                                                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FlexRay (Option)       | <p>Triggers on the specified position (TSS End, FSS_BSS End, FES End, DTS End), frame (null, Sync, Start, All), symbol (CAS/MTS and WUS), error (Head CRC Err, Tail CRC Err, Decode Err, and Random Err) of the FlexRay signal (up to 10 Mb/s).</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p> |
| I2S (Option)           | <p>Triggers on 2's complement data of audio left channel, right channel, or either channel (=, ≠, &gt;, &lt;, &lt;&gt;, &gt;&lt;). The available alignment modes include I2S, LJ, and RJ.</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p>                                                       |
| MIL-STD-1553B (Option) | <p>Triggers on Sync (Data Sync, Cmd/Status Sync, and All Sync), Data, RTA, RTA +11Bit, and Error (Sync Error and Check Error) of the MIL-STD-1553B bus.</p> <p>Source channel: CH1 to CH4, D0 to D15<sup>[11]</sup></p>                                                                                         |

## Search & Navigation

| Search & Navigation |                                                                                                                                |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Type                | Edge, Pulse                                                                                                                    |
| Source              | Analog channel                                                                                                                 |
| Copy                | Copies the search settings from or to the trigger settings mutually, including threshold setting and search condition settings |
| Save                | Saves the search event to the internal or external memory                                                                      |
| Navigation          | Time navigation: navigates to the acquired waveforms in time order.                                                            |
|                     | Event navigation: uses the navigation keys to scroll through the event search results and navigates to the specified event.    |

## Waveform Measurement

| Waveform Measurement |                   |                                                                                                                              |
|----------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------|
| Cursor               | Number of Cursors | 2 pairs of XY cursors                                                                                                        |
|                      | Manual Mode       | Voltage deviation between cursors ( $\Delta Y$ )                                                                             |
|                      |                   | Time deviation between cursors ( $\Delta X$ )                                                                                |
|                      |                   | Reciprocal of $\Delta X$ (Hz) ( $1/\Delta X$ )                                                                               |
|                      | Track Mode        | Fix Y-axis to track X-axis waveform point's voltage and time values                                                          |
|                      |                   | Fix X-axis to track Y-axis waveform point's voltage and time values                                                          |
|                      | Auto Measurement  | Allows to display cursors during auto measurement                                                                            |
|                      | XY Mode           | Measures the voltage parameters of the corresponding channel waveforms in XY time base mode.<br>X = Channel 1, Y = Channel 2 |

## Waveform Measurement

|                     |                            |                                                                                                                                                                                                    |
|---------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Auto<br>Measurement | Number of Measurements     | 41 auto measurements; and up to 14 measurements can be displayed at a time.                                                                                                                        |
|                     | Measurement Source         | CH1 to CH4, D0 to D15 <sup>[11]</sup> , Math1 to Math4                                                                                                                                             |
|                     | Measurement Range (Region) | Main, Zoom, and Cursor                                                                                                                                                                             |
|                     | All Measurement            | Displays 33 measurement items (vertical and horizontal) for the current measurement channel; the measurement results are updated continuously.                                                     |
|                     | Vertical                   | Vmax, Vmin, Vpp, Vtop, Vbase, Vamp, Vupper, Vmid, Vlower, Vavg, VRMS, Per. VRMS, AC. RMS, Overshoot, Preshoot, Area, and Period Area.                                                              |
|                     | Horizontal                 | Period, Frequency, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Positive Pulse Count, Negative Pulse Count, Rising Edge Count, Falling Edge Count, Tvmax, Tvmin, +Slew Rate, and -Slew Rate |
|                     | Others                     | Delay(A↑-B↑), Delay(A↑-B↓), Delay(A↓-B↑), Delay(A↓-B↓), Phase(A↑-B↑), Phase(A↑-B↓), Phase(A↓-B↑), and Phase(A↓-B↓)                                                                                 |
| Statistics          |                            | Items: Current, Average, Max, Min, Standard Deviation, Count<br>Statistical times settable                                                                                                         |

## Waveform Calculation

### Waveform Calculation

|                       |               |                                                                                                                                   |
|-----------------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------|
| No. of Math Functions |               | 4 math functions available to be displayed at one time                                                                            |
| Operation             |               | A+B, A-B, A×B, A/B, FFT, A&&B, A  B, A^B, !A, Intg, Diff, Sqrt, Lg, Ln, Exp, Abs, AX+B, LowPass, HighPass, BandPass, and BandStop |
| Color Grade           |               | FFT supported                                                                                                                     |
| FFT                   | Record Length | Max. 1 Mpts; for FFT operation, max. 1 Mpts for analysis                                                                          |
|                       | Window Type   | Rectangular, Blackman-Harris, Hanning (default), Hamming, Flattop, and Triangle.                                                  |
|                       | Peak Search   | A maximum of 15 peaks, determined by the user-defined threshold and offset threshold                                              |

## Waveform Analysis

| Waveform Analysis  |               |                                                                                                                                                                                                                                                                      |
|--------------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Waveform Recording |               | Stores the signal under test in segments according to the trigger events, that is, saves all the sampled waveform data as a segment to the RAM for each trigger event. The maximum number of the sampled segments reaches 500,000.                                   |
|                    | Source        | All enabled analog channels and digital channels                                                                                                                                                                                                                     |
|                    | Analysis      | Supports playing waveforms frame by frame or continuous playing; capable of calculating, measuring, and decoding the played waveforms                                                                                                                                |
| PassFail           |               | Compares the signal under test with the user-defined mask to provide the test results: the number of successful tests, failed tests, and the total number of tests. The pass/fail event can enable immediate stop, beeper, and the screenshot.                       |
|                    | Source        | Any analog channel                                                                                                                                                                                                                                                   |
| Histogram          |               | The waveform histogram provides a group of data, showing the number of times a waveform hits within the defined region range on the screen. The waveform histogram not only shows the distribution of hits, but also the ordinary measurement statistics.            |
|                    | Source        | Any analog channel, auto measurement item                                                                                                                                                                                                                            |
|                    | Type          | Horizontal, vertical, and measure histogram                                                                                                                                                                                                                          |
|                    | Measure       | Measure histogram statistics: Type, Sum, Peaks, Max, Min, Pk_Pk, Mean, Median, Mode, Bin Width, Sigma, and XScale<br>Histogram statistics: Sum, Peaks, Max, Min, Pk_Pk, Median, Mode, Bin Width, Sigma, $\mu \pm \sigma$ , $\mu \pm 2\sigma$ , and $\mu \pm 3\sigma$ |
|                    | Sampling Mode | Supports all modes, except the Zoom, XY, and ROLL modes                                                                                                                                                                                                              |
| Color Grade        |               | Provide a dimensional view for color grade waveforms, color grade >16, 256-level color scale display                                                                                                                                                                 |
|                    | Source        | Any analog channel                                                                                                                                                                                                                                                   |
|                    | Color Theme   | Temperature and intensity                                                                                                                                                                                                                                            |
|                    | Sampling Mode | Supports all modes                                                                                                                                                                                                                                                   |

## Serial Decoding

| Serial Decoding     |                                                                                                                                                                                                                                                                                                                         |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of Decodings | Four protocol types can be decoded and enabled at the same time                                                                                                                                                                                                                                                         |
| Decoding Type       | Standard: Parallel, RS232/UART, I2C, SPI, LIN, CAN<br>Option: CAN-FD, FlexRay, I2S, and MIL-STD-1553B                                                                                                                                                                                                                   |
| Parallel            | Up to 4 bits of Parallel decoding, supporting any analog channel Supports user-defined clock and auto clock settings.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                                                                                                                                          |
| RS232/UART          | Decodes the RS232/UART (up to 20 Mb/s) bus's TX/RX data (5-9 bits), parity (Odd, Even, or None), and stop bits (1-2 bits)<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                                                                                                                                      |
| I2C                 | Decodes the address (with or without the R/W bit) of the I2C bus, data, and ACK.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                                                                                                                                                                               |
| SPI                 | Decodes the MISO/MOSI data (4-32 bits) of the SPI bus. The available mode includes "Timeout" and "CS".<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                                                                                                                                                         |
| CAN                 | Decodes the remote frame (ID, byte number, CRC), overload frame, and data frame (standard/extended ID, control domain, data domain, CRC, and ACK) of the CAN bus (up to 5 Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>     |
| LIN                 | Decodes the protocol version (1.X or 2.X) of the LIN bus (up to 20 Mb/s). The decoding displays sync, ID, data, and check sum.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                                                                                                                                 |
| CAN-FD (Option)     | Decodes the remote frame (ID, byte number, CRC), overload frame, and data frame (standard/extended ID, control domain, data domain, CRC, and ACK) of the CAN-FD bus (up to 10 Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup> |
| FlexRay (Option)    | Decodes the frame ID, PL (payload), Header CRC, Cycle Count, Data, Tail CRC, and DTS of the FlexRay bus (up to 10 Mb/s). The supported signal types include BP, BM, and RX/TX.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                                                                                 |

## Serial Decoding

|                        |                                                                                                                                                                                             |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I2S (Option)           | Decodes I2S audio bus left channel data and right channel data, supporting 4-32 bits. The alignment modes include I2S, LJ, and RJ.<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup> |
| MIL-STD-1553B (Option) | Decodes the MIL-STD-1553B bus signal's data word, command word, and status word (address+last 11 bits).<br>Source channel: CH1 to CH4, D0 to D15 <sup>[11]</sup>                            |

## Bode Plot<sup>[5]</sup>

### Bode Plot

|                           |                  |
|---------------------------|------------------|
| Start Freq                | 10 Hz to 3 MHz   |
| Stop Freq <sup>[12]</sup> | 100 Hz to 30 MHz |
| Points/Decade             | 10 to 100        |
| Output Amplitude          | 20 mV to 10 V    |

## Function/Arbitrary Waveform Generator (AFG)<sup>[4]</sup>

### AFG (technical specifications are typical values)

|                     |                                                                                                                                                                             |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of Channels  | 2                                                                                                                                                                           |
| Output Mode         | Normal 2-channel output                                                                                                                                                     |
| Sample Rate         | 1 GSa/s                                                                                                                                                                     |
| Vertical Resolution | 16-bit                                                                                                                                                                      |
| Max. Frequency      | Option AFG100: 100 MHz<br>Option AFG50: 50 MHz                                                                                                                              |
| Output Waveform     | Basic waveforms: Sine, Square, Ramp, DC, Noise, Arb; built-in waveforms: Sinc, Exp.Rise, Exp. Fall, ECG1, Gauss, Lorentz, and Haversine<br>User-defined waveform: supported |

**AFG (technical specifications are typical values)**

|        |                                 |                                                                                                                                |
|--------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Sine   | Frequency Range                 | Option AFG100: 2 mHz to 100 MHz<br>Option AFG50: 20 mHz to 50 MHz                                                              |
|        | Flatness                        | Typical (in relative to 1 kHz Sine, 0 dBm)<br><10 MHz: $\pm 0.2$ dB<br>$\geq 10$ MHz to <100 MHz: $\pm 0.5$ dB                 |
|        | Harmonic Distortion             | Typical (0 dBm)<br>10 Hz to <10 MHz: <-55 dBc<br>$\geq 10$ MHz to <50 MHz: <-50 dBc<br>$\geq 50$ MHz: <-40 dBc                 |
|        | Spurious (non-harmonics)        | Typical (1 Vpp)<br>10 Hz to <10 MHz: <-60 dBc<br>$\geq 10$ MHz to <50 MHz: <-50 dBc<br>$\geq 50$ MHz: < -50 dBc + 6 dBc/Octave |
|        | Total Harmonic Distortion (THD) | Typical (1 Vpp)<br>10 Hz to 20 kHz: <0.1%                                                                                      |
|        | Phase Noise                     | Typical (1 Vpp amplitude, 10 kHz offset) 20 MHz: <-110 dBc/Hz                                                                  |
|        | Residual Clock Noise            | Typical (0 dBm), -50 dBm                                                                                                       |
|        | Channel-to-Channel Crosstalk    | Typical (1 Vpp amplitude, 0 V offset)<br><100 MHz: <-35 dBc                                                                    |
|        | Phase                           | 0° to 360°, 0.01° resolution                                                                                                   |
|        |                                 |                                                                                                                                |
| Square | Frequency Range                 | Option AFG100: 2 mHz to 20 MHz<br>Option AFG50: 20 mHz to 10 MHz                                                               |
|        | Rise/Fall Time                  | Typical (amplitude $\leq 2$ Vpp, 50 $\Omega$ load), < 10 ns                                                                    |
|        | Overshoot                       | Typical (0 dBm amplitude, frequency > 1 MHz), <5%                                                                              |
|        | Duty Cycle                      | 1% to 99%, adjustable                                                                                                          |
|        | Jitter (rms)                    | Typical (0 dBm amplitude, frequency > 1 kHz), 500 ps                                                                           |
|        | Phase                           | 0° to 360°, 0.01° resolution                                                                                                   |

**AFG (technical specifications are typical values)**

|                     |                                  |                                                                                                                          |
|---------------------|----------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Ramp                | Frequency Range                  | Option AFG100: 2 mHz to 2 MHz<br>Option AFG50: 20 mHz to 1 MHz                                                           |
|                     | Linearity                        | Typical (frequency 1 kHz, amplitude 1 Vpp, symmetry 100%) $\leq 1\%$ of peak output (within the 10%~90% amplitude range) |
|                     | Symmetry                         | 0% to 100%                                                                                                               |
|                     | Phase                            | 0° to 360°, 0.01° resolution                                                                                             |
| Noise               | Type                             | White Noise                                                                                                              |
|                     | -3 dB Bandwidth                  | Typical (0 dB), > 100 MHz                                                                                                |
| Arbitrary Waveforms | Frequency Range                  | Option AFG100: 2 mHz to 20 MHz<br>Option AFG50: 20 mHz to 10 MHz                                                         |
|                     | Waveform Length                  | 16 kpts                                                                                                                  |
|                     | File Type                        | CSV                                                                                                                      |
| Built-in Waveform   | Frequency Range                  | Option AFG100: 2 mHz to 20 MHz<br>Option AFG50: 20 mHz to 10 MHz                                                         |
| Frequency           | Accuracy                         | $\pm 1.5 \text{ ppm} \pm 1 \text{ ppm/year}$ (@10 MHz)                                                                   |
|                     | Resolution                       | 0.1 Hz or 10 digits, whichever is greater                                                                                |
| Amplitude           | Output Range (into 50 $\Omega$ ) | 1 mVpp to 10 Vpp ( $\leq 50 \text{ MHz}$ )<br>1 mVpp to 5 Vpp ( $\leq 100 \text{ MHz}$ )                                 |
|                     | Output Range (into HighZ)        | 2 mVpp to 20 Vpp ( $\leq 50 \text{ MHz}$ )<br>2 mVpp to 10 Vpp ( $\leq 100 \text{ MHz}$ )                                |
|                     | Resolution                       | 0.1 mVpp or 3 digits, whichever is smaller                                                                               |
|                     | Accuracy                         | $\pm(1.5\% \text{ of the setting value} + 5 \text{ mVpp})$ (1 kHz Sine, 0 V offset)                                      |
|                     | Unit                             | Vpp                                                                                                                      |
|                     |                                  |                                                                                                                          |

## AFG (technical specifications are typical values)

|                  |                                                    |                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DC Offset        | Range                                              | ±5 Vpk (AC + DC) (into 50 Ω)<br>±10 Vpk (AC + DC) (into HighZ)                                                                                                                                                                                                                                                                                                                                              |
|                  | Resolution                                         | 1 mV or 4 digits                                                                                                                                                                                                                                                                                                                                                                                            |
|                  | Accuracy                                           | ±(1.5% of  offset setting value  + 5 mV + 0.5% of amplitude (Vpp)) (into 50 Ω)<br>±(1.5% of  offset setting value  + 5 mV + 1% of amplitude (Vpp)) (into HighZ)                                                                                                                                                                                                                                             |
| Output Impedance | Typical (0 dBm amplitude, 0 Vdc offset), 50 Ω ± 1% |                                                                                                                                                                                                                                                                                                                                                                                                             |
| Modulation       | AM                                                 | Modulating waveform: Sine, Square, Triangle, UpRamp, DnRamp, Noise<br>Carrier waveform: Sine, Square, Ramp<br>Modulation Source: Internal<br>Modulation Depth: 0% to 120%<br>Modulation Frequency: 2 mHz to 1 MHz                                                                                                                                                                                           |
|                  |                                                    | Modulating Waveform: Sine, Square, Triangle, UpRamp, DnRamp, and Noise<br>Carrier Waveform: Sine, Square, Ramp<br>Modulation Source: Internal<br>Frequency Deviation: 2 mHz to set carrier frequency (limited by the carrier frequency setting; the sum of the frequency deviation and carrier frequency shall not exceed the upper limit of the carrier frequency)<br>Modulation Frequency: 2 mHz to 1 MHz |
|                  |                                                    | Modulating Waveform: Sine, Square, Triangle, UpRamp, DnRamp, Noise<br>Carrier Waveform: Sine, Square, Ramp<br>Modulation Source: Internal<br>Phase Shift: 0° to 360°, default 90°<br>Modulation Frequency: 2 mHz to 1 MHz                                                                                                                                                                                   |
|                  |                                                    | Modulating Waveform: Sine, Square, Triangle, UpRamp, DnRamp, Noise<br>Carrier Waveform: Sine, Square, Ramp<br>Modulation Source: Internal<br>Phase Shift: 0° to 360°, default 90°<br>Modulation Frequency: 2 mHz to 1 MHz                                                                                                                                                                                   |

## Auto

### Auto

AutoScale      Min voltage > 10 mVpp, duty cycle > 1%, frequency > 35 Hz

## Digital Voltmeter

### Digital Voltmeter

|               |                                                                                |
|---------------|--------------------------------------------------------------------------------|
| Source        | Any analog channel                                                             |
| Function      | DC, AC+DC <sub>rms</sub> , AC <sub>rms</sub>                                   |
| Resolution    | ACV/DCV: 3 digits                                                              |
| Limits Beeper | Sounds an alarm when the voltage value is within or outside of the limit range |

## High-precision Frequency Counter

### High-precision Frequency Counter

|                |                                                        |                          |
|----------------|--------------------------------------------------------|--------------------------|
| Source         | Any Analog Channel and digital channel <sup>[11]</sup> |                          |
| Measure        | Frequency, period, totalizer                           |                          |
| Counter        | Resolution                                             | 3-6 digits, user-defined |
|                | Max. Frequency                                         | Max. analog bandwidth    |
| Totalizer      | 48-bit totalizer                                       |                          |
|                | Counts the number of the rising edges                  |                          |
| Time Reference | Internal reference                                     |                          |

## Command Set

### Command Set

|                                 |                    |
|---------------------------------|--------------------|
| Common Commands Support         | IEEE488.2 Standard |
| Error Message Definition        | Error messages     |
| Support Status Report Mechanism | Status Reporting   |
| Support Syn Mechanism           | Synchronization    |

## Display

### Display

|            |                                                                 |
|------------|-----------------------------------------------------------------|
| LCD        | 7-inch capacitive multi-touch screen, gesture enabled operation |
| Resolution | 1024×600 (Screen Region) 16:9                                   |

| Display     |                                                      |
|-------------|------------------------------------------------------|
| Graticule   | (10 horizontal divisions) x (8 vertical divisions)   |
| Persistence | Min, Infinite, variable persistence (100 ms to 10 s) |
| Brightness  | 256 intensity levels (LCD, HDMI)                     |

## Processor System

| Processor System             |                                            |
|------------------------------|--------------------------------------------|
| Processor                    | Cortex-A72 up to 1.8 GHz, 6-core processor |
| System Memory                | 4 GB RAM                                   |
| Operating System             | Android                                    |
| Internal Non-volatile Memory | 32 GB                                      |

## I/O

| I/O                |                 |                                                                                                                                                                                                                      |
|--------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| USB2.0 Host        |                 | 1 on the front panel, 500 mA                                                                                                                                                                                         |
| USB2.0 Device      |                 | 1 on the rear panel                                                                                                                                                                                                  |
| LAN                |                 | 1 on the rear panel, 10/100 Base-T, supporting LXI-C                                                                                                                                                                 |
| Web Remote Control |                 | Supports Web Control interface (input the IP address of the oscilloscope into the Web browser to display the operation interface of the oscilloscope)                                                                |
| AFG OUT            | Waveform Output | 2 on the rear panel, BNC connector                                                                                                                                                                                   |
| AUX OUT Output     |                 | 1 on the rear-panel, BNC connector                                                                                                                                                                                   |
|                    | Interface       | $V_o(H) \geq 2.5\text{ V}$ open circuit, $\geq 1.0\text{ V } 50\ \Omega$ to GND<br>$V_o(L) \leq 0.7\text{ V}$ to load $\leq 4\text{ mA}$ , $\leq 0.25\text{ V } 50\ \Omega$ to GND<br>rise time $\leq 1.5\text{ ns}$ |
|                    | Trig Out        | Outputs a pulse signal when the oscilloscope is triggered                                                                                                                                                            |
|                    | Pass/Fail       | Outputs a pulse signal when a pass/fail event occurs. Supports user-defined pulse polarity and pulse time (100 ns to 10 ms)                                                                                          |
| HDMI HD            | Video Output    | 1 on the rear panel, HDMI 1.4, A plug. Used to connect to an external monitor or projector                                                                                                                           |

## I/O

|              |                                                                             |
|--------------|-----------------------------------------------------------------------------|
| Probe        | 1 kHz frequency, 0 to 3 V <sub>pp</sub> amplitude, Square, rise time < 1 μs |
| Compensation |                                                                             |
| Output       |                                                                             |

## Power Supply

### Power Supply

|                 |                                           |
|-----------------|-------------------------------------------|
| Power Interface | Type-C interface                          |
| Power Voltage   | DC 20 V, 5 A                              |
| Power           | 70 W (connect to various interfaces, USB) |

## Environment

### Environment

|                   |               |                                                |
|-------------------|---------------|------------------------------------------------|
| Temperature Range | Operating     | 0°C to +50°C                                   |
|                   | Non-operating | -30°C to +60°C                                 |
| Humidity Range    | Operating     | below +30°C: ≤90% RH (without condensation)    |
|                   |               | +30°C to +40°C, ≤75% RH (without condensation) |
|                   |               | +40°C to +50°C, ≤45% RH (without condensation) |
|                   | Non-operating | below 60°C: ≤90% RH (without condensation)     |
| Altitude          | Operating     | Below 3,000 m                                  |
|                   | Non-operating | Below 15,000 m                                 |

## Warranty and Calibration Interval

### Warranty and Calibration Interval

|                                  |                                                                      |
|----------------------------------|----------------------------------------------------------------------|
| Warranty                         | Three years for the mainframe, excluding the probes and accessories. |
| Recommended Calibration Interval | 18 months                                                            |

# Regulations

| Regulations                   |                                                                                                                                                    |                                                                                                                                     |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Electromagnetic Compatibility | Compliant with EMC DIRECTIVE 2014/30/EU, compliant with or higher than the standards specified in IEC 61326-1:2013/EN 61326-1:2013 Group 1 Class A |                                                                                                                                     |
|                               | CISPR 11/EN 55011                                                                                                                                  |                                                                                                                                     |
|                               | IEC 61000-4-2:2008/EN 61000-4-2                                                                                                                    | ±4.0 kV (contact discharge), ±8.0 kV (air discharge)                                                                                |
|                               | IEC 61000-4-3:2002/EN 61000-4-3                                                                                                                    | 3 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)                                                       |
|                               | IEC 61000-4-4:2004/EN 61000-4-4                                                                                                                    | 1 kV power line                                                                                                                     |
|                               | IEC 61000-4-5:2001/EN 61000-4-5                                                                                                                    | 0.5 kV (phase-to-neutral voltage); 1 kV (phase-to-earth voltage); 1 kV (neutral-to-earth voltage)                                   |
|                               | IEC 61000-4-6:2003/EN 61000-4-6                                                                                                                    | 3 V, 0.15-80 MHz                                                                                                                    |
|                               | IEC 61000-4-11:2004/EN 61000-4-11                                                                                                                  | Voltage dip: 0% UT during half cycle; 0% UT during 1 cycle ; 70% UT during 25 cycles<br>short interruption: 0% UT during 250 cycles |
| Safety                        | EN 61010-1:2019                                                                                                                                    |                                                                                                                                     |
|                               | EN 61010-031:2015                                                                                                                                  |                                                                                                                                     |
|                               | IEC 61010-1:2016                                                                                                                                   |                                                                                                                                     |
|                               | IEC 61010-2-030:2017                                                                                                                               |                                                                                                                                     |
|                               | UL 61010-1:2012 R7                                                                                                                                 |                                                                                                                                     |
|                               | UL 61010-2-31:2017 R2                                                                                                                              |                                                                                                                                     |
|                               | CAN/CSA-22.2 No. 61010-1-12:2017                                                                                                                   |                                                                                                                                     |
|                               | CAN/CSA-22.2 No. 61010-2-30:2018                                                                                                                   |                                                                                                                                     |
| Vibration                     | CAN/CSA-22.2 No. 61010-031-07:201                                                                                                                  |                                                                                                                                     |
|                               | Meets GB/T 6587; class 2 random<br>Meets MIL-PRF-28800F and IEC60068-2-6; class 3 random                                                           |                                                                                                                                     |

## Regulations

|       |                                                                                                                     |
|-------|---------------------------------------------------------------------------------------------------------------------|
| Shock | Meets GB/T 6587-2012; class 2 random                                                                                |
|       | Meets MIL-PRF-28800F and IEC 60068-2-27; class 3 random                                                             |
|       | In non-operating conditions: 30 g, half-sine wave, 11 ms duration, 3 shocks along the main axis, total of 18 shocks |

## Mechanical Characteristics

### Mechanical Characteristics

|            |                                              |
|------------|----------------------------------------------|
| Dimensions | 265.35 mm (W) x 161.75 mm (H) x 77.38 mm (D) |
|------------|----------------------------------------------|

|                        |                                        |
|------------------------|----------------------------------------|
| Weight <sup>[13]</sup> | Package excluded: approximately 1.6 kg |
|                        | Package included: approximately 2.6 kg |

## Non-volatile Memory

### Non-volatile Memory

|                    |                                                                        |                                                                                                                 |
|--------------------|------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Data/File Storage  | Setup/Image                                                            | setup (*.stp), image (*.png, *.bmp, *.jpg)                                                                      |
|                    | Waveform Data                                                          | CSV waveform data (*.csv), binary waveform data (*.bin), list data (*.csv), and reference waveform data (*.ref) |
| Internal Capacity  | 32 GB                                                                  |                                                                                                                 |
| Reference Waveform | Displays 10 internal waveforms                                         |                                                                                                                 |
| Setting            | Storage is limited by the capacity                                     |                                                                                                                 |
| USB Capacity       | Supports the USB storage device that conforms to the industry standard |                                                                                                                 |

### Note:

[1]: Single-channel mode: If any one of the channels is enabled, it is called single-channel mode.

[2]: Half-channel mode: If any two channels are enabled, it is called half-channel mode.

[3]: All-channel mode: If all of the channels are enabled or any three of the channels are enabled, it is called all-channel mode.

[4]: Optional configuration of AFG100 (2-channel, 100 MHz, 1 GSa/s Function/Arbitrary Waveform Generator) or AFG50 (2-channel, 50 MHz, 1 GSa/s Function/Arbitrary Waveform Generator).

[5]: The optional two-channel Function/Arbitrary Waveform Generator (AFG) supports Bode plot function.

[6]: Single-channel mode, recording mode, 20 ns/div, 1 kpts memory depth (or Auto memory depth).

[7]: 10 MHz signal input, 100 mV/div.

[8]: 200  $\mu$ V/div and 500  $\mu$ V/div is a magnification of 1 mV/div setting. For vertical accuracy calculations, use full scale of 8 mV.

[9]: For any channel, under the same input impedance with DC-coupled, the Volts/div setting is the same for 100 mV/div and 200 mV/div.

[10]: The channel-to-channel skew is  $\pm 5$  ns when the sample rate of the digital channel is 1 GSa/s and the period is 1 ns.

[11]: The digital channels are available to choose when the logic analyzer probe is connected.

[12]: The stop frequency shall be greater than the start frequency.

[13]: Standard configuration.

# Order Information and Warranty Period

## Order Information

| Order Information                                                               | Order No.       |
|---------------------------------------------------------------------------------|-----------------|
| <b>Model</b>                                                                    |                 |
| 800 MHz, 4 GSa/s, 100 Mpts, 4-CH digital oscilloscope                           | MHO984          |
| 500 MHz, 4 GSa/s, 100 Mpts, 4-CH digital oscilloscope                           | MHO954          |
| 350 MHz, 4 GSa/s, 100 Mpts, 4-CH digital oscilloscope                           | MHO934          |
| <b>Standard Accessory</b>                                                       |                 |
| Power Adapter Conforming to the Standard of the Destination Country             | — —             |
| Ground Cable                                                                    | — —             |
| USB Cable                                                                       | — —             |
| 4 Passive Probes (350 MHz) (Standard Configuration for MHO934)                  | PVP2350         |
| 4 Passive Probes (500 MHz) (Standard Configuration for MHO984 and MHO954)       | RP3500A         |
| <b>Performance Upgrade Option</b>                                               |                 |
| 500 Mpts Memory Depth Option                                                    | MHO900-RLU-05   |
| 350 MHz-500 MHz Bandwidth Upgrade Option                                        | MHO900-BWU03T05 |
| 350 MHz-800 MHz Bandwidth Upgrade Option                                        | MHO900-BWU03T08 |
| 500 MHz-800 MHz Bandwidth Upgrade Option                                        | MHO900-BWU05T08 |
| <b>Function Upgrade Option</b>                                                  |                 |
| 50 MHz Function/Arbitrary Waveform Generator (AFG) option (Bode plot supported) | MHO900-AFG50    |

| Order Information                                                                              | Order No.     |
|------------------------------------------------------------------------------------------------|---------------|
| 100 MHz Function/Arbitrary Waveform Generator (AFG) option<br>(Bode plot supported)            | MHO900-AFG100 |
| Audio Serial Bus Trigger and Analysis Option                                                   | MHO900-AUDIOA |
| CAN Serial Bus Analysis with Flexible Data Rate                                                | MHO900-AUTOA  |
| FlexRay Serial Bus Trigger and Analysis Option                                                 | MHO900-FlexA  |
| MIL-STD-1553 Bus Trigger and Analysis Option                                                   | MHO900-AEROA  |
| Function and Application Bundle Options, including AFG100,<br>AUDIOA, AUTOA, FlexA, and AEROA. | MHO900-BND    |
| <b>Recommended Accessories</b>                                                                 |               |
| 16-channel Logic Analyzer Probe                                                                | PLA2216       |
| Portable Instrument Bag                                                                        | BAG-800       |


## NOTE:

For all the mainframes, accessories, and options, please contact the local office of RIGOL.

# Warranty Period

Three years for the mainframe, excluding the probes and accessories.

# Option Ordering and Installation Process

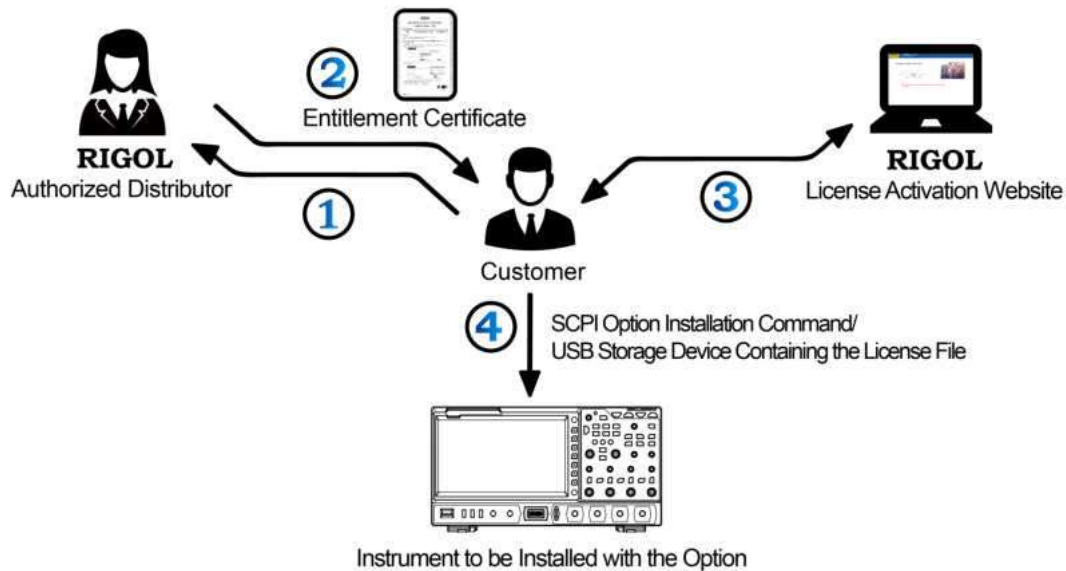

1. According to the usage requirements, please purchase the specified function options from **RIGOL Sales Personnel**, and provide the serial number of the instrument that needs to install the option.
2. After receiving the option order, the **RIGOL** factory will mail the paper software product entitlement certificate to the address provided in the order.
3. Log in to **RIGOL** official website for registration. Use the software key and instruments serial number provided in the entitlement certificate to obtain the option license code and the option license file.
4. Install the option by running the SCPI command concerning the option installation. You can also save the option license file to the root directory of the USB storage device. Then insert it to the instrument. After being recognized, follow the instructions to install the option.

## NOTE:


If any problems occur during the option installation process, please contact **RIGOL** technical team.

# Boost Smart World and Technology Innovation


Industrial Intelligent  
Manufacturing



Semiconductors



Education &  
Research

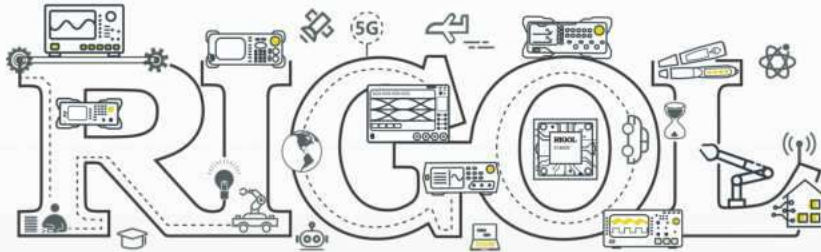

Communication

System Integration



New Energy



- 5G Cellular-5G/WIFI
- UWB/RFID/ ZIGBEE
- Digital Bus/Ethernet
- Optical Communication

- Digital/Analog/RF Chip
- Memory and MCU Chip
- Third-Generation Semiconductor
- Solar Photovoltaic Cells

- New Energy Automobile
- PV/Inverter
- Power Test
- Automotive Electronics

*Provide Testing and Measuring Products  
and Solutions for Industry Customers*

## HEADQUARTER

**RIGOL TECHNOLOGIES CO., LTD.**  
No.8 Keling Road, New District,  
Suzhou, Jiangsu, P.R.China  
Tel: +86-400620002  
Email: info-cn@rigol.com

## JAPAN

**RIGOL JAPAN CO., LTD.**  
5F, 3-45-6, Minamitsuka, Toshima-Ku,  
Tokyo, 170-0005, Japan  
Tel: +81-3-6262-8932  
Fax: +81-3-6262-8933  
Email: info.jp@rigol.com

## EUROPE

**RIGOL TECHNOLOGIES EU GmbH**  
Friedrichshafener Str. 5  
82205 Gilching  
Germany  
Tel: +49(0)8105-27292-21  
Email: info-europe@rigol.com

## KOREA

**RIGOL KOREA CO., LTD.**  
5F, 222, Gonghang-daero,  
Gangseo-gu, Seoul, Republic of Korea  
Tel: +82-2-6953-4466  
Fax: +82-2-6953-4422  
Email: info.kr@rigol.com

## NORTH AMERICA

**RIGOL TECHNOLOGIES, USA INC.**  
10220 SW Nimbus Ave.  
Suite K-7  
Portland, OR 97223  
Tel: +1-877-4-RIGOL-1  
Email: sales@rigol.com

## For Assistance in Other Countries

Email: info.int@rigol.com

**RIGOL®** is the trademark of **RIGOL TECHNOLOGIES CO., LTD.** Product information in this document is subject to update without notice. For the latest information about **RIGOL's** products, applications and services, please contact local **RIGOL** channel partners or access **RIGOL** official website: **www.rigol.com**